

Mars Series

360W/365W/370W/375W/380W

SUN 60M-H6(BK)

9BB HALF-CELL MONO PV MODULE



COMPREHENSIVE CERTIFICATES

IEC61215 / IEC61730 / IEC61701 / IEC62716 / IEC62804
 ISO 9001: 2015 Quality management systems;
 ISO 14001: 2015 Environmental management systems;
 OHSAS 18001: 2007 Occupational health and safety management systems;

Sunergy Advantages



Power attenuation rate surpass than industry standards

As the CTC randomization test, our attenuation rate is 1.81%, 0.31% and 0.34% in the 1st, 2nd and 3rd year, which is much less than the national standard value of 2% and 0.55%.



Overflow tank can be waterproof

The excess silicone will flow into the overflow tank, can reduce 3% water vapor entering the panels.



Stronger frame

The C side of the frame contains curved hook reinforcement, enhanced the mechanical load strength by 10%.



Current grading

Current classification effectively avoids 2% power loss caused by current mismatch during installation, achieving max output power.



IP68 junction box

IP68 junction box offer perfect waterproof performance.

SUNERGY USA WORKS LLC


Founded in 2008, Sunergy is a manufacturer of high-performance photovoltaic products. With 12 manufacturing bases and more than 20 branches around the world, the company's business covers modules, photovoltaic power stations and EPC. Sunergy products are available in over 120 countries and regions and are used extensively in ground-mounted power plants, commercial & industrial rooftop PV systems and residential rooftop PV systems.

QUALIFICATIONS AND CERTIFICATES



LINEAR PERFORMANCE WARRANTY

- 12 Years Manufacturing Warranty
- 12 Years 90% Power Output
- 25 Years 80% Power Output

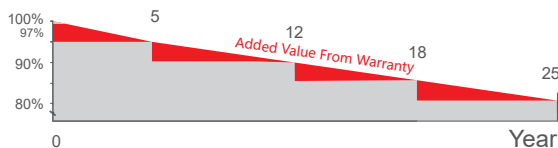


SUNERGY USA WORKS LLC
www.sunergyworks.com




Mars Series SUN 60M-H6(BK)

MECHANICAL DRAWINGS

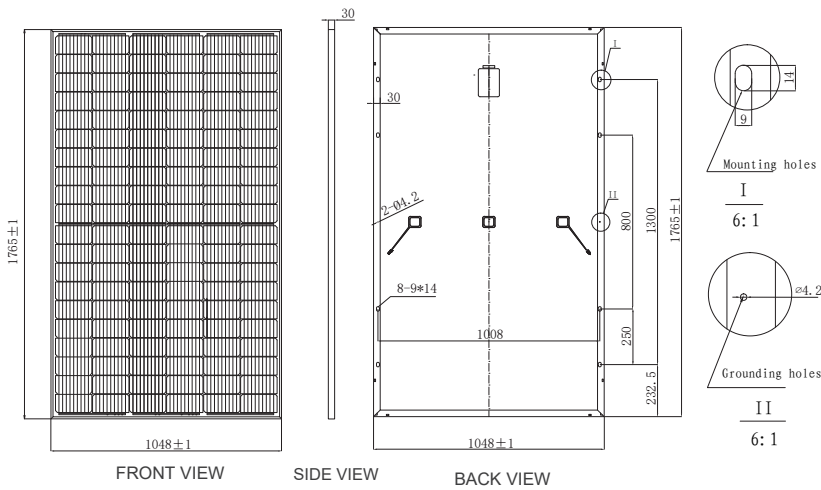


I-V CURVES

I-V Curves at SUN365-60M-H6(BK) at different Irradiances

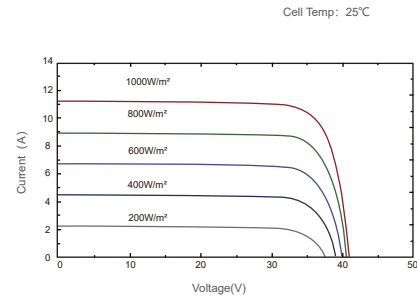

Power voltage current curve at different temperature



MECHANICAL SPECIFICATION

Cell Type	Mono Crystalline 166x83mm
Number Of Cells	120 (6x20)
Dimensions(AxBxC)	1765x1048x30mm
Weights	20.5kg
Glass	3.2mm Tempered Low Iron Glass
Aluminium Frame	Anodised Aluminium
Junction Box	Split Junction Box (IP68 ,three diode)
Connector	Mc4 Compatible
Output Cables	4.0mm²,+300mm,-300mm Customized Length

PACKING CONFIGURATION

Container	40' HQ
Pieces Per Pallet	36
Pallets Per Container	24
Pieces Per Container	888

ELECTRICAL CHARACTERISTICS

Module Type	360W		365W		370W		375W		380W	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power At STC(Pmax)	360W	270.6W	365W	274.4W	370W	278.1W	375W	281.9W	380W	285.6W
Short Circuit Current(Isc)	11.08A	8.95A	11.16A	9.02A	11.26A	9.10A	11.34A	9.16A	11.42A	9.23A
Open Circuit Voltage(Voc)	40.9V	38.1V	41.1V	38.3V	41.3V	38.5V	41.5V	38.7V	41.7V	38.9V
Maximum Power Current(Imp)	10.59A	8.49A	10.67A	8.55A	10.76A	8.62A	10.84A	8.69A	10.92A	8.75A
Maximum Power Voltage(Vmpp)	34.0V	31.9V	34.2V	32.1V	34.4V	32.3V	34.6V	32.5V	34.8V	32.7V
Module Efficiency	19.46%		19.73%		20.00%		20.27%		20.54%	
Power Tolerance	0~+5W		0~+5W		0~+5W		0~+5W		0~+5W	
Maximum System Voltage	VDC 1500V									
Maximum Series Fuse	20A									
Increased Snowload Acc.to Iec 61215	5400Pa									
Operating Temperature	-40~+85°C									
Number Of Bypass Diodes	3									
Norminal Operating Cell Temperature(Noct)	45°C±2°C									
Temperature Coefficient Of Pmax	-0.36%/°C									
Temperature Coefficient Of Voc	-0.29%/°C									
Temperature Coefficient Of Isc	0.05%/°C									

STC: 1000W/m2 irradiance, 25°C cell temperature, AM1.5. NOCT: Irradiance at 800W/m² , Ambient Temperature 20°C , wind speed 1m/s .



SUNERGY USA WORKS LLC
www.sunergyworks.com

